

# INCREMENTAL ROTARY ENCODER

"Magnetic Measurement, 37 mm Body Diameter, Semi Hollow Shaft"

**ARS B 38** 



## **GENERAL SPECIFICATIONS**

- Incremental measurement with magnetic principle
- Resolution up to 1024 pulses
- 37 mm body diameter
- Semi hollow shaft options from 4 mm to 10 mm
- 3000 RPM operating speed
- 300 KHz response frequency
- High accuracy
- Robust structure, long operating life
- Compact design
- IP54 protection class







ARS B 38 series rotary encoders measure with magnetic principle and operate incrementally. It offers resolution up to 1024 pulses per revolution. In these encoders with 37 mm compact body; from 4 to 10 mm semi-hollow shaft options are available.

### **APPLICATIONS**

- Wind Applications / Power Plants
- Marine or Utility Vehicle Applications
- Press or Wood and Stone Processing Machinery
- Construction Machinery
- Cranes







- Offshore Applications
- Commercial Solar Plants
- Filling Plants
- Food & Beverage Applications
- Oil & Gas Pipe Handling and Cranes







### **TECHNICAL SPECIFICATIONS**

*Resolution	Resolution options between 1 and 1024 pulses						
Operating Speed	3000 RPM max.						
Measuring Type	Magnetic						
Response Frequency	300 KHz						
<b>Current Consumption</b>	50 mA nominal						
*Electrical Interface		PP	TTL	HTL	HPL	OCL	ОСР
	Supply	1030 VDC	5 VDC	1030 VDC	530 VDC	The supply signal should not be lower than the output signal	
	Output	1030 VDC PP	5 VDC TTL	1030 VDC PP	530 VDC PP	NPN Open Collector	PNP Open Collector
*Output Signals	A, /A, B, /B, Z, /Z						
Output Current	100 mA max. (per channel)						

\*Electrical Connection 5 or 8x0,14 mm² shielded cable

Body Diameter 37 mm

\*Shaft Diameter 4 mm...10 mm

Operating Temperature -25...+85 °C

Storage Temperature -40...+100 °C

IP Protection Class

ii Trotection class

Weight ~110 gr

Body: Aluminum


Material Shaft: Stainless Steel

Note: The specifications indicated by (\*) vary according to the model selected. The detailed code table for product selection is shown on page 2.


DS-ARX.016 Rev No:1


### **ELECTRICAL CONNECTIONS**

SIGNAL	CABLE COLOR		
Α	YELLOW		
/B	WHITE		
+V	RED		
0 V	BLACK		
/A	BLUE		
В	GREEN		
/Z	GREY		
Z	PINK		

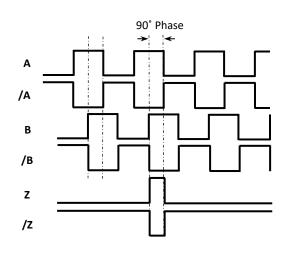

The table above shows the cable colors of the sensor output signals. If the control circuit is suitable in the Line Driver sensors of the not output signals (/A, /B, /Z) have to be added to the system. If it is not suitable /A, /B, /Z signal cables must be fixed as insulated separately. Don't forget that these edges have electricity too.

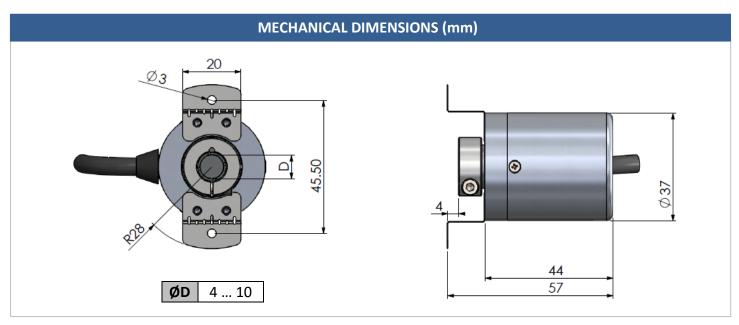

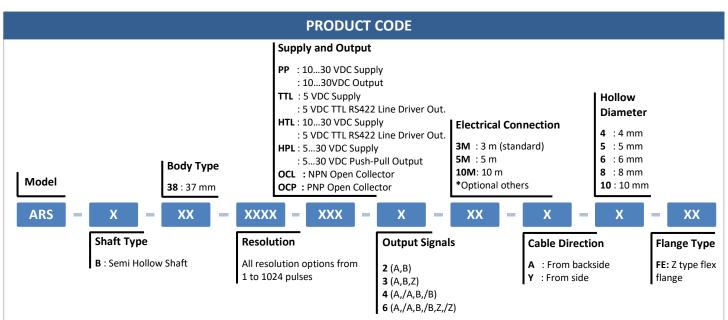

فروشگاه کانون ابزار

Atek Elektronik Sensör Teknolojileri Sanayi ve Ticaret A.Ş.

Gebze OSB, 800. Sokak, No:814 Gebze/KOCAELİ/TURKEY

تلفن : 021 66 39 39 30 00 موبايل: 9912 147 3023 www.ali5.ir

Tel: +90 262 673 76 00





