

MRI 40A

Rotary Incremental Encoder

کانون ابزار

تلفن :

021 66 39 39 00

0912 147 3023

ali5.ir



INCREMENTAL 增量


- 40 mm case diameter
- 4 - 8 - 16 - 20 - 25 - 32 - 40 - 50 - 64 - 80 - 100 - 125 - 128
160 - 200 - 250 - 256 - 400 - 500 - 512 - 800 - 1000 - 1024 ppr.
- Push-Pull, TTL, Linedriver, Highlinedriver output
- Rod diameter 4 - 6 - 8 mm
- IP 54 protection level




Technical Specifications

Type of measurement	Magnetic incremental non-contact
Resolution	4 - 1024 ppr.
Output channels	A, B, Z or A,Ā, B,Ā, Z, Z̄
Output type	TTL, Linedriver, Push-Pull, Highlinedriver
Power supply	8-24 VDC (standard) or 5 VDC (optional)
Power consumption (without load)	<40 mA (24 VDC)
Electrical connection	2,5 meter cable (standard)
Max. permissible shaft loading : Radial	100 N
: Axial	60 N
Displacement speed	3500 rpm
Rod diameter	∅4 - 6 - 8 mm
Rod material	Stainless steel
Case diameter	∅40 mm
Case material	Aluminium / Steel
Protection level	IP 54
Operating temperature	-20°C ... +80°C
Storage temperature	-30°C ... +90°C

Mechanical Specifications

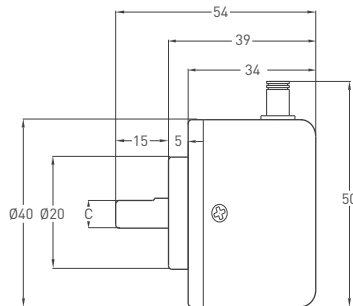

Rod type / Radial



Push-Pull Cable Output

+V : Brown
0V : White
GND : Shield
Ch A : Yellow
Ch B : Green
Ch Z : Grey

TTL - HLD - Linedriver Cable Output

+V : Brown
0V : White
GND : Shield
Ch A : Yellow
Ch B : Green
Ch Z : Grey
Ch A inv : Blue
Ch B inv : Red
Ch Z inv : Pink

کانون ابزار

تلفن :

021 66 39 39 00

0912 147 3023

ali5.ir

MRI 40	R (rod)	
	C	D
	∅4 mm	3,3 mm
	∅6 mm	5,5 mm
	∅8 mm	7,3 mm

Ordering Procedure

Model	Case diameter	Case type	Rod diameter	Output type	Resolution	Output signal	Power supply	Connector / Cable	Cable output
MRI	40	A	8	HLD	512	Z	V2	2M5	R
MRI	40 mm	A : Clamping flange AW : Watertight	R4 : 4 mm R6 : 6 mm R8 : 8 mm	LTD : Push-Pull LD : Linedriver HLD : High Linedriver TT : TTL	4 - 1024 ppr.	Z : A, B, Z B : A, B Z̄ : AĀ, BĀ, Z̄	V1 : 5 VDC V2 : 8 - 24 VDC	2M5 : 2,5 meter cable 5M : 5 meter cable 8M : 8 meter cable 10M : 10 meter cable C12 : 12 pin connector	R : Radial A : Axial