


Incremental encoders

Resolution 1024...8192 pulses



FNC F82 Series

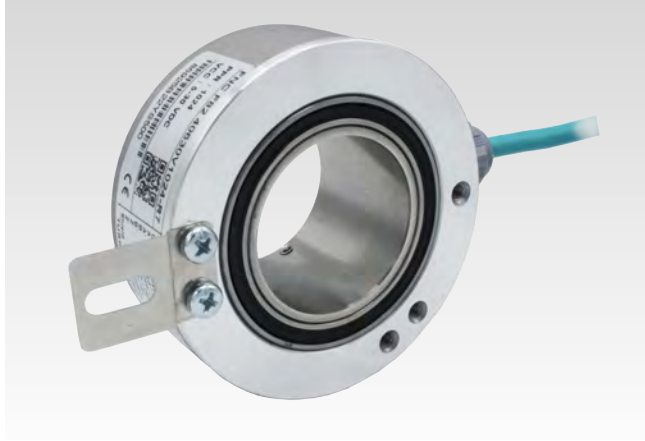

Features

- Special 80 mm design, through hollow shaft
- Robust mechanical and electrical construction
- Protection up to IP65
- Up to 8192 PPR max.
- <300 kHz frequency

PPR Options :

1024 - 2000 - 2048 - 4000 - 4096 - 8000 - 8192

Technical data - electrical ratings

Voltage supply	4.75VDC to 30VDC 4.75VDC to 5.5VDC
Protection:	Output short circuit protection. Reverse polarity protection (except 5V version)
Consumption w/o load	≤60 mA (24 VDC)
Resolution (steps/turn)	1024...8192
Reference signal	Zero pulse, width 90° 180°, 360° optional
Optoelectronic life time	100.000 (min)
Output frequency	<300 kHz
Output signals	90° shifted A and B, Z + inverted
Output circuit	Linedriver/RS422 Push-pull short-circuit proof NPN Open Collector
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Approval	CE

Technical data - mechanical design

Dimensions (flange)	ø80 mm
Shaft loading	≤140 N axial ≤240 N radial
Protection DIN EN 60529	IP54, IP65
Operating speed	≤10000 rpm
Starting torque	≤0.025 Nm
Materials	Housing: Stainless steel Flange: Stainless steel Shaft : Stainless steel
Shaft diameter:	38, 40, 42, 44 mm (other diameters on request)
Bearings lifetime:	2x10 ⁹ rev. at 100% of full rated shaft load (minimum)
Operating temperature	-20...+85 °C
Storage temperature	-30 °C up to +90 °C
Weight approx.	300 g

کانون ابزار

تلفن:



۰۲۱ ۶۶ ۳۹ ۳۹ ۰۰

۰۹۱۲ ۱۴۷ ۳۰۲۳

ali5.ir



Mechanical Dimensions

Standard Version

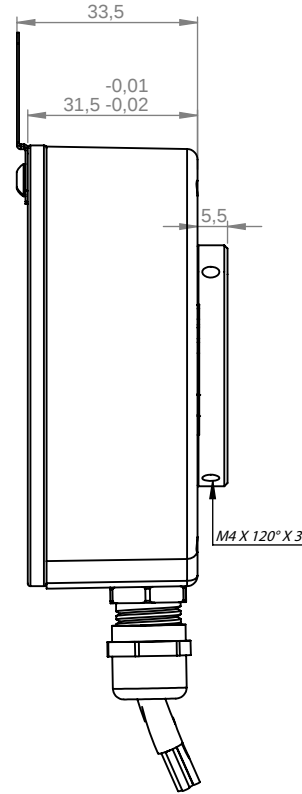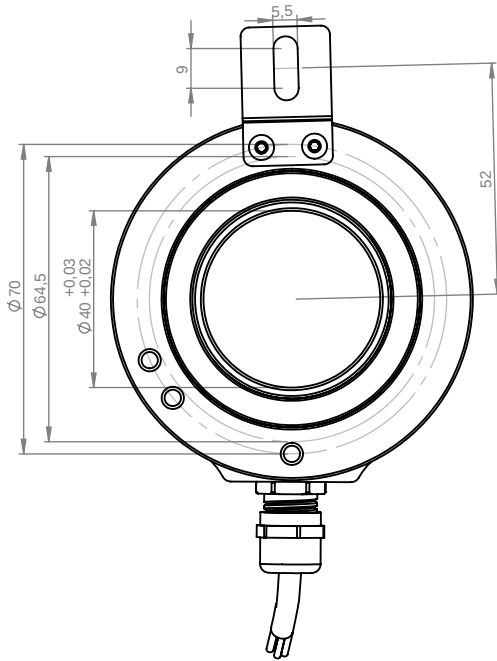

BS Verison (Screw from Bearing Side)

00 / 16.06.22

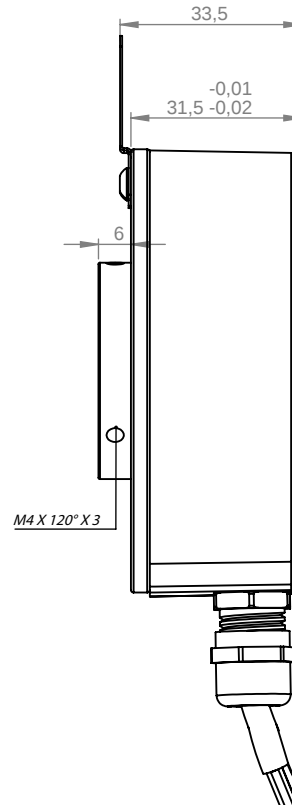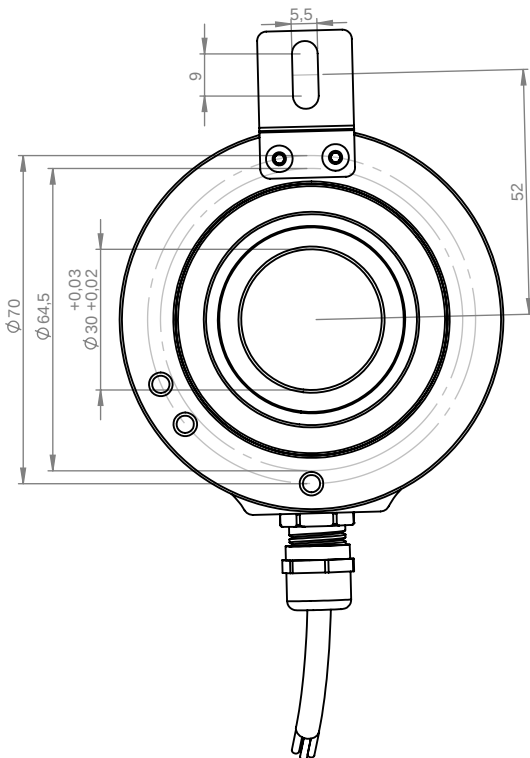

00/ 16.06.2022

Incremental encoders


Resolution 1024...8192 pulses

FNC F82 Series

Cable Wiring

Function	Color	Renk	Explanation
+VB	Brown	Kahve	Supply Voltage
GND	White	Beyaz	Ground
A	Green	Yeşil	A Channel
A'	Red	Kırmızı	A Inverted Channel
B	Yellow	Sarı	B Channel
B'	Pink	Pembe	B Inverted Channel
Z	Gray	Gri	Z Channel
Z'	Blue	Mavi	Z Inverted Channel
Shield	Black	Siyah	Shield

Pulse Diagram

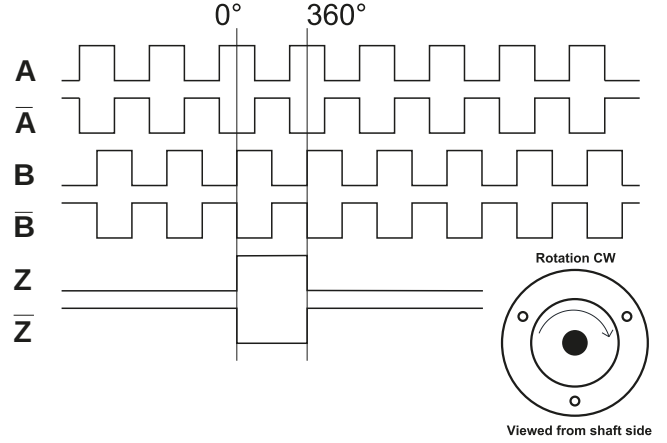

کانون ابزار

تلفن:

۰۲۱ ۶۶ ۳۹ ۳۹ ۰۰

۰۹۱۲ ۱۴۷ ۳۰۲۳

ali5.ir

Encoder Part Number

FNC F82 44 6 30V 1024 — R7

F82 : Standard Model Shaft Screw from Seal Side
F82BS : Shaft Screw from Bearing Side

Shaft diameter : 25, 28, 30, 32, 34, 35, 38, 40, 42, 44 mm
Other dimensions on request

Output Channels

1: A
2: AB
3: ABZ
4: AB+A' B'
6: ABZ+A' B' Z'

Electrical Connections:

Cable
R7 : radial 7m, shield not connected (standart)

Connector:
R1204, R1205, R1608, R2312R, R2312L

PPR Options :

1024 - 2000 - 2048 - 4000 - 4096 - 8000 - 8192

Supply Voltage and output circuit :

5V : 5V in / out
245V : 5-30V in 5V out
30V : 5-30V in / out