

Incremental encoders

Resolution 1024...10.000 pulses



FNC 100HD Series



Features

- Industry 100 mm design, through hollow shaft
- Robust mechanical and electrical construction
- Protection up to IP67
- Up to 10.000 PPR max.
- <300 kHz frequency


PPR Options :

1024 - 2000 - 2048 - 2500 - 4000 - 4096 - 5000
- 8000 - 8192 - 10000

Technical data - mechanical design

Dimensions (flange)	ø100 mm
Shaft loading	≤140 N axial ≤240 N radial
Protection DIN EN 60529	IP54, IP65
Operating speed	≤10.000 rpm
Starting torque	≤0.025 Nm (IP 67)
Materials	Housing: aluminium Flange: aluminium Shaft : stainless steel
Shaft diameter:	26, 28, 30, 32, 38 ,40 ,42 mm (other diameters on request)
Bearings lifetime:	2x10 ⁹ rev. at 100% of full rated shaft load (minimum)
Operating temperature	-20...+85 °C
Storage temperature	-30 °C up to +90 °C
Weight approx.	700 g

Pulse Diagram

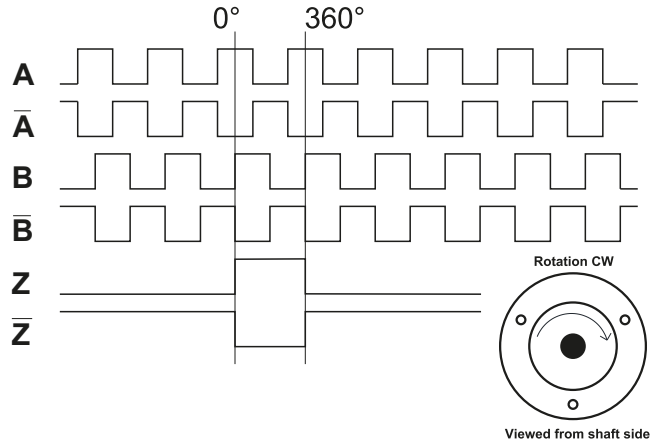

کانون ابزار
تلفن:
۰۲۱ ۶۶ ۳۹ ۳۹ ۰۰
۰۹۱۲ ۱۴۷ ۳۰۲۳
ali5.ir

Incremental encoders


Mechanical Dimensions

Cable/Connector Wiring, Part Number

FNC 100HD Series



Mechanical Dimensions

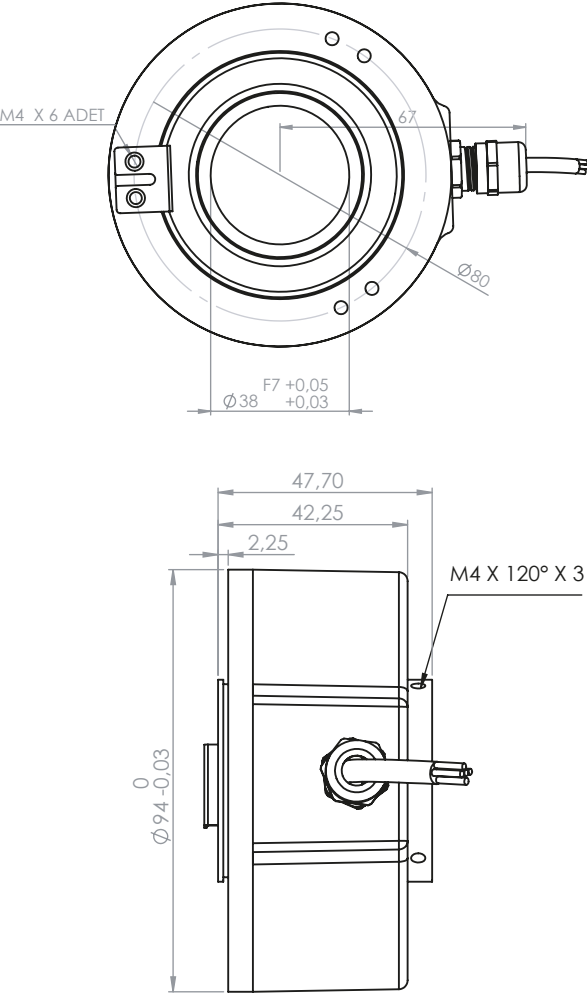

Connector Wiring

Connector Type	+Vcc	GND	A	A'	B	B'	Z	Z'	Shield
CRM1204	1	2	3		4				o.r.
CRM1205	1	2	3		4		5		o.r.
CRM1208	1	2	3	6	4	7	5	8	o.r.
CRM1212	1	2	3	6	4	7	5	8	o.r.
CRM1607	1	2	3		4		5		o.r.
CRM1614	Customer Specific								o.r.
CRM2312R	2-12	10-11	5	6	8	1	3	4	o.r.
CRM2312L	2-12	10-11	5	6	8	1	3	4	o.r.

Cable Wiring

Function	Color	Renk	Explanation
+VB	Brown	Kahve	Supply Voltage
GND	White	Beyaz	Ground
A	Green	Yeşil	A Channel
A'	Red	Kırmızı	A Inverted Channel
B	Yellow	Sarı	B Channel
B'	Pink	Pembe	B Inverted Channel
Z	Gray	Gri	Z Channel
Z'	Blue	Mavi	Z Inverted Channel
Shield	Black	Siyah	Shield

Encoder Part Number

FNC

100

HD

38

6

30V

1024

—

R2

Housing:
100 : 100mm

Flange Type:
HD : Through hollow shaft - thick version

Shaft diameter : 26, 28, 30, 32, 38, 40, 42, 44, 45
Other dimensions on request

Output Channels
1: A
2: AB
3: ABZ
4: AB+A' B'
6: ABZ+A' B' Z'

Electrical Connections:
Cable
R2 : radial 2m, shield not connected (standart)

Connector:
R1204 R1607
R1205 R1614
R1208 R2312R
R1212 R2312L

PPR Options :
1024 - 2000 - 2048 - 2500 - 4000 - 4096 - 5000
- 8000 - 8192 - 10000

Supply Voltage and output circuit :
5V : 5V in / out
245V : 5-30V in 5V out
30V : 5-30V in / out